

# Estimation of the strong motion generation area based on the acceleration envelope of records from the 2011 off the Pacific coast of Tohoku Earthquake.

Masumitsu KUSE & Masata SUGITO

*River Basin Research Center, Gifu University, Gifu city, Japan.*

**ABSTRACT:** The information on source process with sufficient accuracy is indispensable for the estimation of strong ground motion near the focal region. The prompt estimation of the seismic intensity distribution based on the information on fault process is specially required for the initial and effective restoration program. This study deals with the inversion technique of source process based on the acceleration envelope. The validity of the technique is examined in the case of the 2011 off the Pacific coast of Tohoku Earthquake.

During this earthquake, strong motion records at many observation stations were obtained by K-NET and KiK-net which are the observation network of National Research Institute for Earth Science and Disaster Prevention. The records are converted to those for rock surface ground motion on the basis of the response analysis code, FDEL. The inversion technique by use of the acceleration envelope is applied to this earthquake. The distribution of the strong motion generation area on the fault plane, which represents the relative contribution ratio of acceleration power release, is obtained. The result was compared well with those from other studies. The results demonstrate the validity of the estimated distribution using the inversion technique.

## 1 INTRODUCTION

The 2011 off the Pacific coast of Tohoku Earthquake that occurred in March 11, 2011, was a devastating earthquake. According to the Fire and Disaster Management Agency (2015), human losses included 19,225 fatalities, 2,614 missing, and 6,219 injured. The damage of the dwelling houses included 127,830 collapses, 275,807 half-collapses, 766,671 partially-collapses, 3,409 inundation above floor level.

In this earthquake, many strong motion records were obtained by K-NET and KiK-net (2015), which are the observation network operated by National Research Institute for Earth Science and Disaster Prevention. Those records provided useful information for estimation of source process. This study deals with the inversion of the SMGA (Strong Motion Generation Area) of the 2011 off the Pacific coast of Tohoku Earthquake, estimated using the inversion technique developed by Kuse *et al.* (2004). In this study, SMGA is represented by the normalized coefficient for the superposition of the evolutionary power spectra assigned for each sub-event in the EMPR (Earthquake Motion Prediction model on Rock surface) (Sugito *et al.*, 2000). Data used for inversion are acceleration envelopes calculated using acceleration records from KiK-net database. In the following part of this paper, we outline the inversion technique used for this study and its application to estimation of the source process in the 2011 off the Pacific coast of Tohoku Earthquake.

## 2 OUTLINE OF SOURCE PROCESS INVERSION

### 2.1 Outline of source process inversion

Figure 1 shows the flow of the inversion method by Kuse *et al.* (2004). In the analysis, the location of hypocenter (latitude, longitude, depth) and the fault parameters (length, width, strike, dip angle) are dealt with as the given parameters. The inversion method consists of two steps: STEP 1 for estimation of the seismic moment and the propagation velocity of fault rupture and STEP 2 for inversion of SMGA.

In STEP 1, the seismic moment,  $M_0$ , and the propagation velocity of rupture,  $v_r$ , are identified. The details are described in Kuse *et al.* (2000). At this stage the SMGA on the fault plane is not considered. The two ground motion parameters are used for the inversion of  $M_0$  and  $v_r$ ; one is the acceleration total power,  $P_t$ , and the other, the strong motion duration,  $t_{90}$ . The definition of  $P_t$  and  $t_{90}$  are shown in Figure 2. The acceleration total power,  $P_t$ , defined by Equation 1 represents the square sum of acceleration time history over the total record length  $T$ :

$$P_t = \int_0^T \{x(t)\}^2 dt \quad (1)$$

where,  $P_t$  is the acceleration total power ( $\text{cm}^2/\text{sec}^3$ ),  $x(t)$  is the acceleration ( $\text{cm}/\text{sec}^2$ ) at time  $t$ ,  $T$  is the total record length of the accelerogram (sec). The parameter,  $t_{90}$ , represents the duration defined as the time length between 5% and 95% in terms of the accumulation of acceleration power as shown in Figure 2.

Next, in the STEP 2, the inversion of normalized ratio of released acceleration power on the fault plane is performed using the seismic moment,  $M_0$ , and the propagation velocity of rupture,  $v_r$ , obtained in STEP1. Kuse *et al.* (2004a, 2004b) proposed two alternative ways of processing acceleration time histories; one deals with the envelope of acceleration time history, and the other deals with the envelope of bandpass-filtered acceleration time history for low, middle, and high frequency ranges. In this paper, the envelope of acceleration time history for the estimation of SMGA was employed.

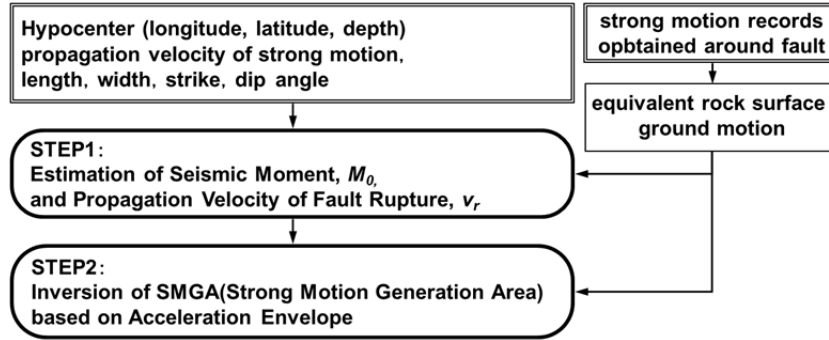


Figure 1 Outline for inversion of source process

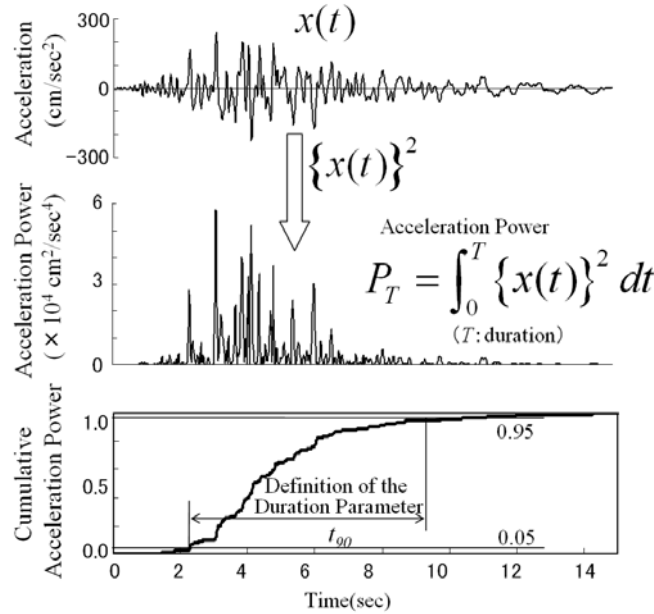


Figure 2 Definition of duration parameter  $t_{90}$  with acceleration total power  $P_T$

## 2.2 Conversion of the Strong Motion Records on the Rock Surface

In this study, the dataset of strong motion records that were observed by KiK-net (2015) stations, were used. Generally two seismometer both on ground surface and underground base rock level are set in the KiK-net system. The inversion method used here is based on the strong motion prediction model, EMPR (Earthquake Motion Prediction model on Rock surface) (Sugito *et al.*, 2000). The EMPR that was used for the analysis is the strong motion prediction model on the rock surface that was defined as the shear wave velocity of 400-600m/sec. Therefore, as shown Figure 1, these records were converted to those on the rock surface level with the shear wave velocity of approximately 400-600m/sec.

Figure 3 shows the outline of conversion for the strong motion records. First, the record on rock surface level (over 500m/sec) was converted based on the soil profile models for these observation stations. The response analysis of layered ground, using the program code FDEL (Frequency Dependent Equi-Linearized technique) (Sugito *et al.*, 1995), has been applied. In this analysis, the lower limits of damping  $h_{min}$  for the rock and harder layer (over 500m/sec) was fixed as  $h_{min}=2.5\%$  based on Enomoto *et al.* (2007). In case of other soils (clay, silt, sand, gravel), the lower limit was fixed as  $h_{min}=5\%$ .

Next, the free-rock surface ground motions were converted to those for the shear wave velocity of 500m/sec based on Midorikawa (1987). The amplification of earthquake motion from the seismic bedrock ( $V_s=3,000\text{m/sec}$ ) to the surface is represented in the following equation.

$$A_v = 170 V_s'^{-0.6} \quad (V_s' < 1,100 \text{ m/sec})$$

$$= 2.5 \quad (V_s' \geq 1,100 \text{ m/sec}) \quad (2)$$

where,  $A_v$  is the amplitude ratio of maximum velocity from the seismic bedrock to the surface,  $V_s'$  is the average of shear wave velocity at 30m below the surface of ground (m/sec).

The correction factor,  $A$ , of acceleration time history from rock surface level of  $V_s=V_{sx}$  to  $V_s = 500$  m/sec is given in the following.

$$A = \frac{A_v(500)}{A_v(V_{sx})} \quad (3)$$

where,  $A$  is the correction factor of the earthquake motion,  $A_v(500)$ ,  $A_v(V_{sx})$  are the amplitude given Equation 3,  $V_{sx}$  is the shear wave velocity on the rock surface at each individual KiK-net site (See Figure 3).

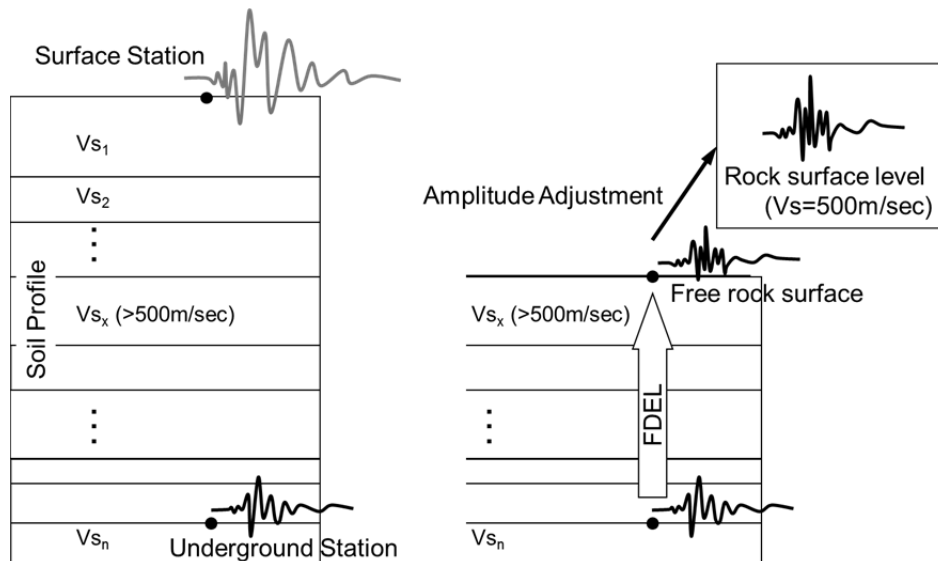


Figure 3 Schematic diagram for calculation of rock surface ground motion with shear wave velocity of 500m/sec

### 3 APPLICATION TO THE 2011 OFF THE PACIFIC COAST OF TOHOKU EARTHQUAKE

The inversion method presented above was applied to the 2011 off the Pacific coast of Tohoku Earthquake. The dataset of strong motion records obtained during this earthquake was used. Figure 4 shows location of the fault plane and the strong motion records obtained of KiK-net (2015) around focal region. These records used in the analysis were obtained at the stations represented by circled numbers in Figure 4. As previously mentioned, these records were converted to those on rock surface level with the shear wave velocity of 500m/sec.

The fault parameters were as below. The seismic moment  $M_0$  was  $6.72 \times 10^{22}$  Nm, and, the propagation velocity of fault rupture  $V_r$  was 2.55 km/sec. As shown in Figure 1, these parameters were estimated through STEP1. The fault plane used parameters that were estimated by Japan Meteorological Agency (2013). The Fault length was 400 km, width was 150km, strike was 201 degrees, dip angle was 9 degrees. The distribution in Figure 4 shows the SMGA that was estimated by using the inversion technique developed by Kuse *et al.* (2004).

The validity of the estimated SMGA is discussed regarding the similarity of the acceleration envelopes. Figure 5 shows the envelopes both for recorded and simulated acceleration envelopes. The records are converted to rock surface level with the shear wave velocity of 500m/sec. These acceleration envelopes are smoothed by the rectangular window of 1.5 sec widths. As shown Figure 5, there are differences of the simulated envelopes at few stations, but most simulated acceleration envelopes can confirm with reproducibility of recorded acceleration envelope.

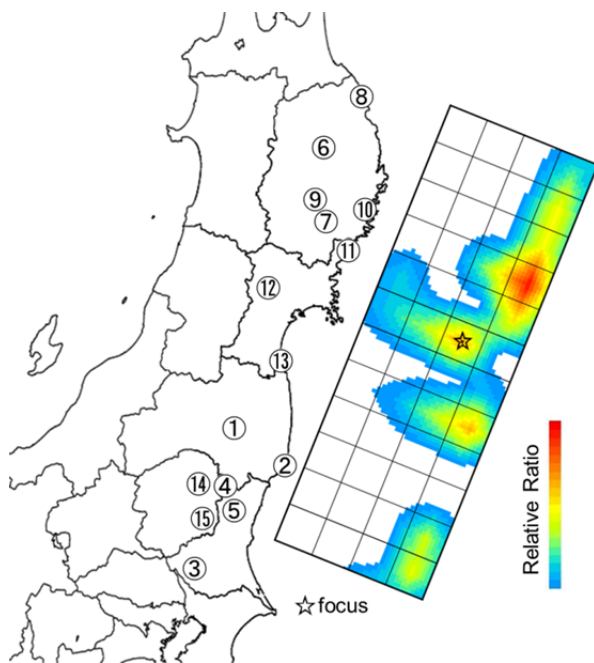


Figure 4 Location of strong motion stations and fault plane (distribution on fault plane is estimated SMGA. The circled number represents location of observation stations.)

Table 1 List of strong motion records

No.	Station Code	Maximum Acceleration on Soil Surface (cm/sec <sup>2</sup> )		Maximum Acceleration on Rock Surface (Vs=500m/sec) (cm/sec <sup>2</sup> )	
		EW	NS	EW	NS
①	FKSH09	411.15	-421.56	509.23	371.03
②	FKSH14	-386.28	349.45	-709.31	485.78
③	IBRH10	295.77	272.35	281.81	-286.99
④	IBRH12	-524.85	-593.21	-365.27	-393.47
⑤	IBRH16	-589.86	-530.76	-387.39	-415.29
⑥	IWTH02	-501.76	-518.92	-238.30	-210.31
⑦	IWTH04	377.95	-310.53	418.21	-490.13
⑧	IWTH08	113.06	-116.08	62.02	-91.90
⑨	IWTH22	-302.01	-265.97	306.28	-250.88
⑩	IWTH23	-511.79	367.21	-378.26	354.05
⑪	MYGH03	-306.33	290.22	481.38	-576.30
⑫	MYGH05	-410.65	-505.67	-379.48	-323.30
⑬	MYGH10	-830.85	-889.53	-387.23	381.82
⑭	TCGH10	-585.37	-592.91	-511.55	372.26
⑮	TCGH16	1133.23	-802.40	-593.31	574.13

### 4 CONCLUSIONS

In this study, the distribution of SMGA for the 2011 off the Pacific coast of Tohoku Earthquake, was estimated by using the inversion technique developed by the authors. The major results derived here may be summarized as follows.

1. The dataset of strong motion records on rock surface for the 2011 off the Pacific coast of Tohoku

Earthquake have been obtained. The original acceleration records were obtained at underground bed rock level in KiK-net observation systems.

2. The SMGA was estimated by an inversion technique developed by the authors. In the analysis, the acceleration envelope for the unit sub-event motion given by the strong motion prediction model, EMPR, was applied. The SMGA obtained in this study represents the relative ratio of release of acceleration power over the fault.
3. The rock surface motions were simulated for the observation points on the basis of the estimated SMGA by using the simulation technique, EMPR. The simulated rock surface motions were compared with observed motions in terms of the acceleration envelope. The result demonstrated the validity of the inversion carried out in this study.

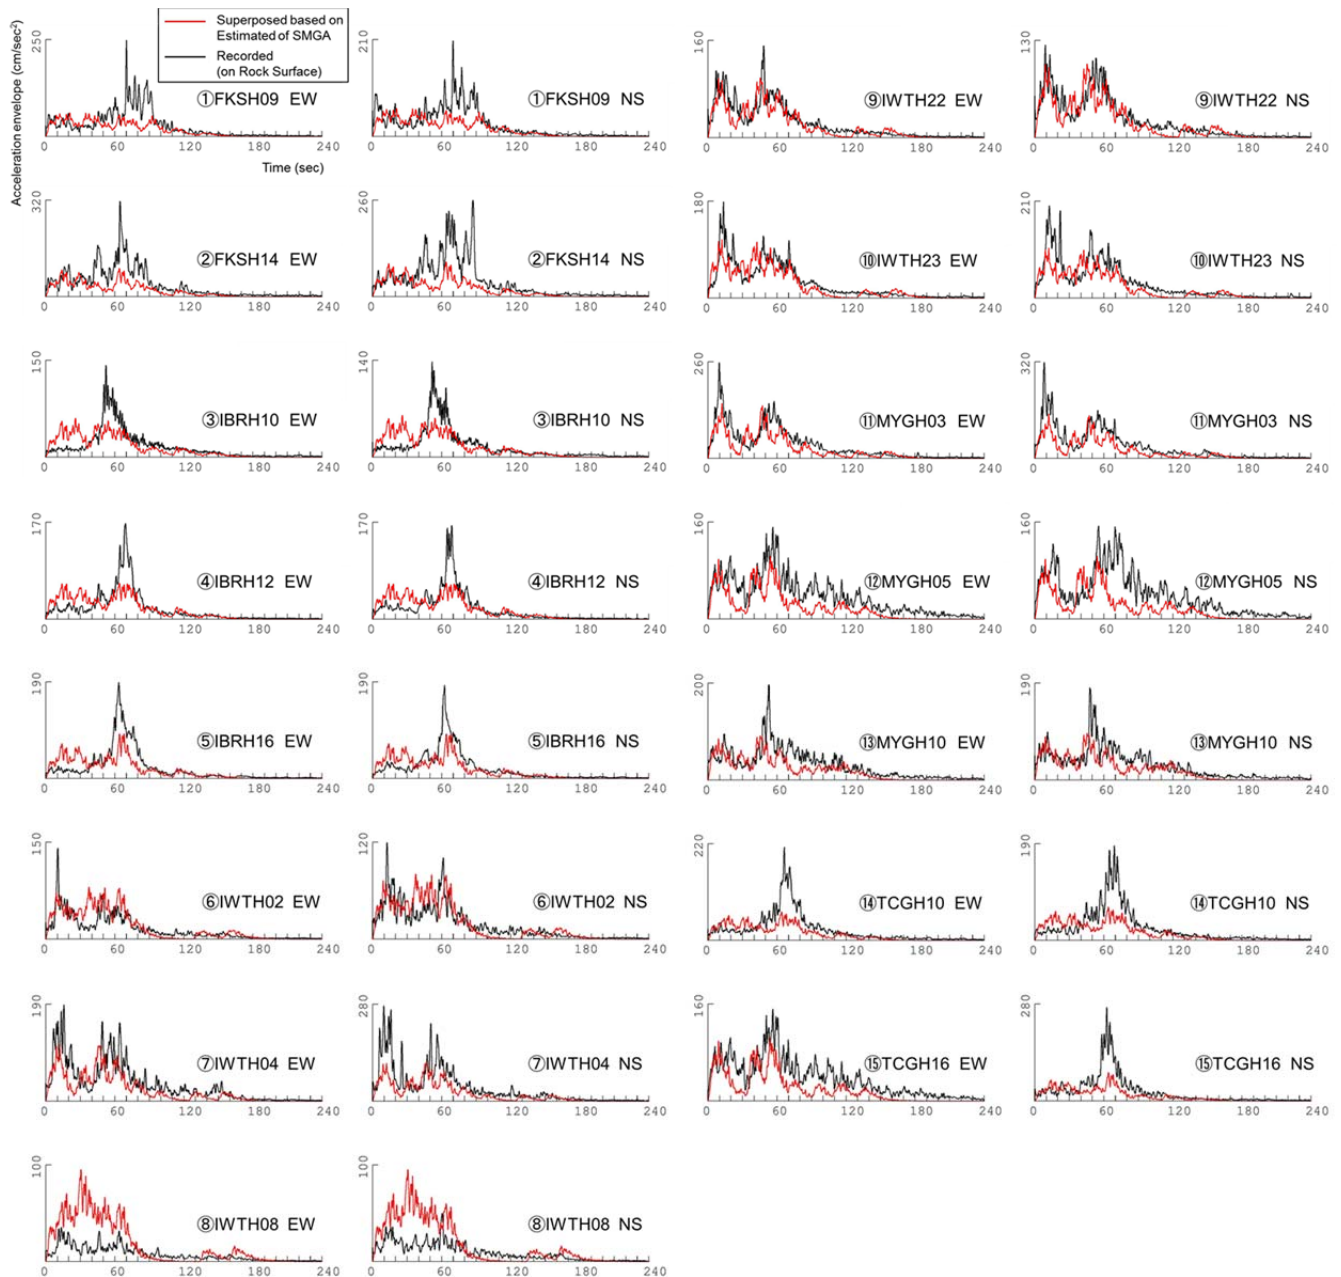


Figure 5 Comparison of Acceleration envelopes of recorded and simulated acceleration time histories

## REFERENCES:

- Enomoto, Y., Sugito, M., and Kuse, M. (2007). The Study of Earthquake Response Analysis based on the KiK-net Records, *JSCE-Chubu Annual Meeting*, I-20 (in Japanese)
- Fire and Disaster Management Agency (2015). Report on the 2011 off the Pacific coast of Tohoku Earthquake (151th report), <http://www.fdma.go.jp/bn/higaihou/pdf/jishin/151.pdf> (in Japanese)
- Japan Meteorological Agency(2013), Source process of the 2011 off the Pacific coast of Tohoku Earthquake used by the near-field strong motion data, <http://www.data.jma.go.jp/svd/eqev/data/sourceprocess/event/20110311near.pdf> (in Japanese)
- Kuse, M., Sugito, M., Nojima, N., Furumoto, Y. (2000). Rapid Estimation of Seismic Intensity Distribution in Urban Areas in Consideration of Fault Rupture Direction. *JCOSSAR2000* vol.4, 229-236. (in Japanese)
- Kuse, M., Sugito, M., and Nojima, N. (2004). Inversion of Source Process in Consideration of Filtered-Acceleration Envelope, *13th World Conference on Earthquake Engineering*, Paper No.665.
- Midorikawa, S. (1987). Prediction of Iseismic Map in the Kanto Plain due to Hypothetical Earthquake, *Journal of Structural Engineering*, Vol.33B, 43-48. (in Japanese)
- National Research Institute for Earth Science and Disaster Prevention (2015), Strong-motion Seismograph Networks (K-NET, KiK-net), <http://www.kyoshin.bosai.go.jp/>
- Sugito, M. (1995). Frequency-dependent Equivalent Strain for Earthquake Response Analysis of soft Ground, *Proc. of IS-Tokyo, '95, The First International Conference on Earthquake Geotechnical Engineering*, 655-660.
- Sugito, M., Furumoto, Y., and Sugiyama, T. (2000). Strong Motion Prediction on Rock Surface by Superposed Evolutionary Spectra. *12th World Conference on Earthquake Engineering*, Paper No.2111.