

## Number of evaluation points to improve accuracy of seismic damage evaluation using point estimate method

K. Iiyama, H. Morikawa, & S. Hirose

*Tokyo Institute of Technology, Tokyo, Japan.*

K. Fujita

*RIKEN Advanced Institute for Computational Science, Hyogo, Japan.*

T. Ichimura

*The University of Tokyo, Tokyo, Japan.*

**ABSTRACT:** The objective of this study is to investigate a practical method for damage evaluation which can be applied to large-scale seismic simulation targets over a wide area with a great number of structures. In order to realize reliable damage estimations based on numerical simulations, it is necessary not only to increase model accuracy, but also to introduce model uncertainty. Rosenblueth's point estimate is one of the useful methods for damage evaluation that considers model uncertainty and requires only a small number of calculations. The point estimate method is based on a technique for numerical integration known as the Gaussian quadrature. It recovers moments of the targeted frequency distribution from only several evaluation points. The estimation accuracy may rise with an increase in the number of evaluation points; however, the number of points and the computational load are in a trade-off relation. This study examines the influence of evaluation points on the accuracy in estimating the statistical values of seismic responses and damage probability. A case study indicates that the amount of improvement in estimation accuracy gradually decreases with increases in the evaluation points. This suggests that increases in the number of evaluation points can work effectively on damage evaluations in large-scale simulations, but only up to a limited number of increases.

### 1 INTRODUCTION

Among the several approaches available for damage estimation, the representative one is based on structural-damage statistics, accumulating past data on seismic hazards and applying damage curves or fragility curves. Another approach is based on a large-scale numerical simulation. Recent sophisticated computational science and technology allows for such a simulation, which can perform elaborate calculations for dealing with a vast amount of information on the seismic source, the underground structures, and the various structures. At the time of a strong earthquake, if the extent of the damage to a large area can be determined on a real-time basis with a high degree of accuracy, this will lead to prompt action against disasters. The Integrated Earthquake Simulator (IES) has been developed for this purpose (e.g., Hori and Ichimura, 2008); it includes a system for seismic response analyses which can target entire cities.

Modelling approaches always include assumptions and inaccuracies to some extent. Therefore, it is desirable that such model uncertainty be considered. On the other hand, damage evaluations that consider model uncertainty generally involve numerous calculations, in order to obtain accurate frequency distributions (FDs) of the building responses; and thus, they are inadequate for large-scale simulations. Point estimate (e.g., Rosenblueth, 1975) is one of the useful methods for overcoming this disadvantage, because it requires only a small number of calculations. Although the estimation accuracy of FDs probably rises with an increase in the number of evaluation points, the number of points and the computational load are in a trade-off relation. To examine the effect of the evaluation points on estimation accuracy, the theory of point estimates is firstly reviewed focusing on the evaluation points and the accuracy in recovering the statistical values of the original FD. Next, the

statistical values of the seismic response are estimated by the point estimate (PE) method for a large number of buildings, and the changes in characteristics of the statistical values are examined with the evaluation points. Finally, the structural damage is evaluated based on the exceedance probability (EP) calculated from the cumulative distribution (CD) of the seismic responses, introducing the Gram-Charlier expansion as the probability density function (PDF) and utilizing the statistical values obtained from the PE. Employing the Monte Carlo method (MCM) as a reference, the number of evaluation points required to improve the accuracy of the seismic damage evaluation is discussed.

## 2 POINT ESTIMATE

### 2.1 Evaluation points for Rosenblueth's point estimate

Let  $X$  and  $Y$  indicate an uncertain building property and the corresponding response of the building, respectively. Then,  $Y$  is a function of  $X$ ,  $Y=g(X)$ , where  $X$  is a random variable with a probability density function,  $p(X)$ . Function  $g(X)$  is unknown, but can be approximated by polynomials.

Rosenblueth's point estimate approximates the low-order moments of  $Y$  using some evaluation points  $X_i$  and corresponding weights  $P_i$ , as follows:

$$E[Y^k] \cong \sum_{i=1}^m P_i \cdot Y_i^k = \sum_{i=1}^m P_i \cdot g^k(X_i) \quad \text{for } m=1,2,\dots \quad (1)$$

where  $m$  is the number of evaluation points.  $P_i$  and  $X_i$  are selected to recover the statistics of  $X$ . For instance, in the case of a two-point estimate,  $P_i$  and  $X_i$  ( $i=1, 2$ ) can be obtained from the following four equations:

$$\sum_{i=1}^m P_i = 1, \quad \sum_{i=1}^m P_i X_i = \mu_X, \quad \sum_{i=1}^m P_i (X_i - \mu_X)^2 = \sigma_X^2, \quad \sum_{i=1}^m P_i (X_i - \mu_X)^3 = \nu_X \sigma_X^3, \quad (2)$$

where  $\mu_X$ ,  $\sigma_X$ , and  $\nu_X$  are the mean, the standard deviation, and the skewness of  $p_X(X)$ , respectively. Since Rosenblueth's explanation for  $X_i$  and  $P_i$  was not detailed and seems to be intuitive, Christian et al. (1999) explained the method by introducing the following numerical integration technique known as the Gaussian quadrature:

$$\int_{-\infty}^{\infty} g(x) p(x) dx \cong \sum_{i=1}^m p_i g(x_i). \quad (3)$$

They revealed that the  $X_i$  and  $P_i$  of Rosenblueth's method correspond to integration point  $x_i$  and corresponding weight  $p_i$ , respectively, of the Gaussian quadrature. With respect to the necessity for Eq. (2), as the condition for recovering the moments of  $Y$ , Miller et al.'s method is also easy to understand (Miller et al., 1983). Equation (3) has equality when the order of polynomial  $g(x)$  is less than or equal to  $2m-1$  and can be rewritten as

$$\int_{-\infty}^{\infty} (a_0 + a_1 x + \dots + a_k x^k) p(x) dx = \sum_{i=1}^m p_i (a_0 + a_1 x_i + \dots + a_k x_i^k) \quad \text{for } k \leq 2m-1. \quad (4)$$

This equation clearly satisfies all coefficients  $a_k$  if we make the moments of discrete point  $x_i$  equal the moments of the original distribution. Thus, the criterion for Eq. (4) becomes

$$E[x^k] = \sum_{i=1}^m p_i x_i^k \quad \text{for } k \leq 2m-1. \quad (5)$$

Since the left side of Eq. (4) is  $E[g(x)]$  itself, Eqs. (4) and (5) indicate that when integration points  $x_i$  are selected to recover the moments of  $x$ ,  $\mu_y = E[g(x)]$  can be obtained as the expectation value using only less than or equal to  $2m-1$  of the  $x_i$  and the corresponding weights  $p_i$ .

Furthermore, PE recovers the high-order moments of a polynomial,  $Y=g(X)$ , using  $m$  integration points of the Gaussian quadrature. This can be understood from the approach reviewed in the next section.

## 2.2 Number of evaluation points and accuracy of recovered moments

In order to understand the relation between the number of evaluation points and the accuracy of the recovered statistics in more detail, we review a part of Hong (1998)'s explanation. The  $k$ th-order central moment of  $X$  is

$$M'_k = \int_{-\infty}^{\infty} (x - \mu_x)^k p(x) dx, \quad (6)$$

where  $\mu_x$  is the mean of  $x$ . Let the polynomial  $g(x)$  represent the Taylor expansion around  $\mu_x$  as

$$g(x) = g(\mu_x) + \sum_{i=1}^{\infty} \frac{1}{i!} g^{(i)}(\mu_x) (x - \mu_x)^i. \quad (7)$$

Then, the expected value for  $Y$  is represented by

$$\mu_y = E[g(X)] = \int_{-\infty}^{\infty} g(x) p(x) dx = g(\mu_x) + \sum_{i=1}^{\infty} \frac{1}{i!} g^{(i)}(\mu_x) M'_i. \quad (8)$$

Using the  $i$ th evaluation point,  $x_i$ , written by  $x_i = \mu_x + \xi_i \sigma_x$  ( $i=1,2,\dots$ ), and considering Eq. (7), the left side of Eq. (1) for  $k=1$  is given by

$$\sum_{k=1}^m p_k g(x_k) = g(\mu_x) \sum_{k=1}^m p_k + \sum_{i=1}^{\infty} \frac{1}{i!} g^{(i)}(\mu_x) \left( \sum_{k=1}^m p_k \xi_k^i \right) \sigma_x^i. \quad (9)$$

To approximate the exact mean value for  $\mu_y$  by Eq. (9), we can match the first  $2m$  terms on the right side of Eqs. (8) and (9).

$$\sum_{k=1}^m p_k \xi_k^i = M'_i / \sigma_x^i = \lambda_{x,i} \quad \text{for } i=0,\dots,2m-1. \quad (10)$$

From the above  $2m$  equations for each  $i$ , unknown parameters  $p_k$  and  $\xi_k$  ( $k=1,\dots,m$ ) can be obtained. Then, the first-order moment of  $Y$  is given from Eqs. (8) and (9) as

$$E[Y] = \mu_y = \sum_{k=1}^m p_k g(x_k) + \sum_{i=2m}^{\infty} \frac{1}{i!} g^{(i)}(\mu_x) (\lambda_{x,i} - \sum_{k=1}^m p_k \xi_k^i) \sigma_x^i \quad (11)$$

If  $g(x)$  is the  $(2m-1)$ th-order polynomial,  $g^{(i)}(\mu_x)$  is equal to zero and PE gives an exact solution for  $\mu_x$ . In addition, Eq. (11) indicates that the estimation error will increase with standard deviation  $\sigma_x$  for a larger-order polynomial. The second-order moment is given by

$$\begin{aligned} E[Y^2] = & \sum_{k=1}^m p_k g^2(x_k) + 2g(\mu_x) \sum_{i=2m}^{\infty} \frac{1}{i!} g^{(i)}(\mu_x) (\lambda_{x,i} - \sum_{k=1}^m p_k \xi_k^i) \sigma_x^i \\ & + \sum_i^{\infty} \sum_j^{\infty} \frac{1}{i!} \frac{1}{j!} g^{(i)}(\mu_x) g^{(j)}(\mu_x) (\lambda_{x,i+j} - \sum_{k=1}^m p_k \xi_k^{i+j}) \sigma_x^{i+j} \quad (i+j \geq 2m). \end{aligned} \quad (12)$$

Similarly, the  $n$ th-order moment includes the term with the  $n$ th power of  $g^{(i)}(\mu_x)$ . Therefore, the exact solution for the  $n$ th-order moment can be obtained if  $g(x)$  is less than the  $(2m/n)$ th-order. Thus, if the function of interest,  $g(x)$ , has a complex form, an increase in evaluation points  $X_i$  is effective for recovering the higher moments of  $Y$ . In addition, care must be taken as the estimation accuracy for the second-order central moment,  $\sigma_Y^2 = E[Y^2] - \mu_Y^2$ , may become less than that for the second-order moment,  $E[Y^2]$ , when the estimation accuracy for  $\mu_Y$  decreases.

## 3 DAMAGE EVALUATION USING POINT ESTIMATE

PE recovers the statistical values for  $Y$ , as described in a previous section. However, the information is

not enough to evaluate the damage probability. Therefore, this study employs a PDF which can approximate the FD of  $Y$  using the high-order statistics obtained by PE.

This study applies the Gaussian distribution to the PDF of stochastic variable  $X$  in the numerical study. Hence, the Gaussian-related distribution function is applied as the PDF with respect to  $Y$ . There are representative PDFs, such as the normal or the lognormal distributions. However, they use only the first two-order central moments (mean and variance). To take higher-order moments into account, the Gram-Charlier expansion (GCE) is applied here. Nakajima and Morikawa (2009) proposed the use of GCE as the PDF of the building response using statistics obtained by three point estimates, and showed the applicability of GCE with PE to non-linear problems. GCE is represented by

$$p(y) = \left[ 1 + \frac{c_3}{6\sigma^3} h_3\left(\frac{y-\mu_Y}{\sigma_Y}\right) + \frac{c_4}{24\sigma^4} h_4\left(\frac{y-\mu_Y}{\sigma_Y}\right) + \dots \right] \phi\left(\frac{y-\mu_Y}{\sigma_Y}\right) \quad (13)$$

where  $\phi$  represents the normal probability distribution and  $h_k(y)$  is the  $k$ th order Hermite polynomial which can evaluate a shift from the normal probability distribution.

$$h_k(y) = e^{\frac{y^2}{2}} \left( -\frac{d}{dy} \right)^k e^{-\frac{y^2}{2}}. \quad (14)$$

where  $c_n$  is the  $n$ th-order cumulant which can be determined from the  $n$ th-order moment,  $m_n$ , given as the expected value of function  $p(y)$ .

$$m_n = \int_{-\infty}^{\infty} y^n p(y) dy \quad (15)$$

From an engineering viewpoint, this study takes the fourth-order Hermite polynomial in Eq. (13), that is, only  $h_3(y)$  and  $h_4(y)$  are considered. Then, moment  $m_n$ ,  $n \leq 4$ , is employed.

The EP for a value of  $\theta$  for the  $i$ th building can be evaluated from the CD of  $p(y)$  as follows:

$$EP_{\theta,i} = 1.0 - \int_{-\infty}^{\theta} p_i(y) dy \quad (0 \leq EP_{\theta,i} \leq 1) \quad (16)$$

To validate the estimation accuracy of this method using PE, the Monte Carlo method (MCM) is also employed as a reference and the results are compared.

## 4 APPLICATION TO LARGE-SCALE SEISMIC SIMULATION

### 4.1 Problem settings

Using the IES code, nonlinear analyses (time interval of 0.0005 s) by the multi-degree-of-freedom (MDOF) shear spring model were performed by targeting 7,348 buildings, the number of stories (Ns) of each one being from one to 37. Inputting the El Centro earthquake to a depth of -50 m from the ground surface, the acceleration waves on the ground surface are calculated by a one-dimensional amplification analysis considering the ground structure under each building. Rayleigh damping is applied as the viscous damping matrix, considering a damping factor of 2.0 or 3.0% for the first and second modes. The damping factor is selected according to the building classification.

### 4.2 Model uncertainty and analytical case

Since the intention of this study is to evaluate a method for damage evaluation using PE itself, rather than a damage evaluation of a specified area, the simplest building model is used. Mass and story stiffness are set to be independent of the story, and story stiffness is modeled by a normal bilinear model. The bilinear model has strong non-linearity and it probably leads the shape of  $g(X)$  to be more complex than general models, e.g., the tri-linear model. Model uncertainty is given to yield story drift angle  $\theta_y$ , and is set at  $p(X)$  so as to follow the Gaussian distribution  $\phi(\mu_x, \sigma_x)$ , as shown in Fig. 1. Analytical cases are prepared, as shown in Table 1, for each set of  $\mu_x$  and coefficient of variation (COV) for  $\theta_y$ . (The standard deviation is  $\sigma_x = \mu_x \times \text{COV}$ .) The damage to the buildings in this study is evaluated by a maximum story drift angle,  $\theta_{max}$ .

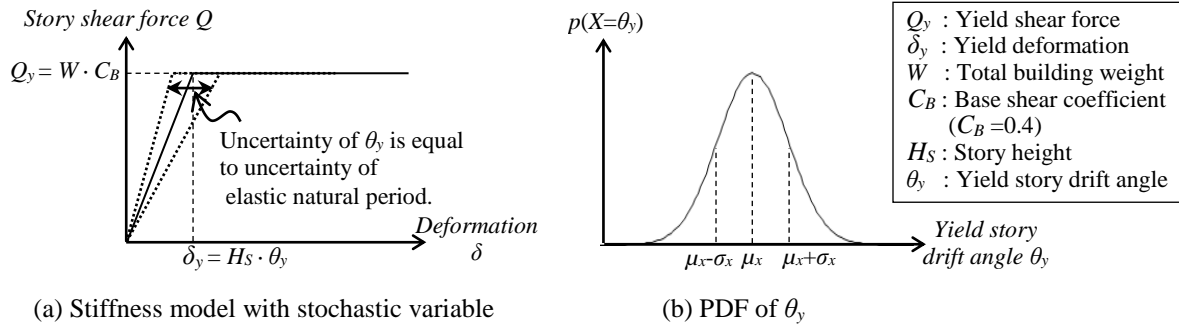


Figure 1. Uncertainty of building properties

Table 1. Analytical cases

Property of $\theta_y$	Case A1	Case A2	Case A3	Case B1	Case B2	Case B3	Case C1	Case C2	Case C3
mean $\mu_x$	1/200	1/200	1/200	1/150	1/150	1/150	1/100	1/100	1/100
COV	0.1	0.2	0.3	0.1	0.2	0.3	0.1	0.2	0.3

\*COV: Coefficient of variation

### 4.3 Setting of evaluation points

To examine the influence of the number of evaluation points on the damage estimation, we apply 3, 5, ..., 15 evaluation points to each calculation case. When  $p(X=\theta_y)$  is normal distribution  $\varphi(0, \sigma_x)$ , Eq. (3) results in the Gauss-Hermite quadrature after an integral transformation. Then, the table of integration points  $x_i$  and the corresponding weight  $p_i$  for  $i \leq 20$  for the Gauss-Hermite quadrature provided by Salzer and Capuano (1952) can be used. Since  $x_i > 0$  is necessary in this study,  $x_i$  is reset to a minimum value of 0.002 if the  $x_i$  is equal to or less than zero. Hereafter, each point estimate is represented by “3PE”, “5PE”, ..., “15PE”.

### 4.4 Estimation of statistics and errors

As for the results for PE, the general properties of  $\theta_{max}$  obtained by MCM are shown in Table 2 for each case. Here, subscript  $k$  indicates the building number ( $k=1, \dots, 7348$ ), and subscripts  $_{ave}$  and  $_{std}$  represent the average and the standard deviations for all the buildings, respectively. For reference, the level of ductility calculated by  $\mu_{Yk\_ave}/\mu_x$  is noted in brackets. The table indicates that  $\theta_{max}$  tends to generally be “Case C > Case B > Case A”. In addition, the standard deviation becomes large with COV, except for Cases B2 and B3.

Table 2. General properties of frequency distribution of  $\theta_{max}$  for 7348 buildings

Properties	Case A1	Case A2	Case A3	Case B1	Case B2	Case B3	Case C1	Case C2	Case C3
$\mu_{Yk\_ave}$	0.020 (4.0)	0.019 (3.8)	0.019 (3.8)	0.022 (4.4)	0.022 (4.4)	0.019 (3.8)	0.028 (5.6)	0.028 (5.6)	0.027 (5.4)
$\mu_{Yk\_std}$	0.0128	0.0123	0.0119	0.0123	0.0123	0.0123	0.0147	0.0141	0.0136
$\sigma_{Yk\_ave}$	0.0027	0.0035	0.0043	0.0031	0.0044	0.0035	0.0040	0.0053	0.0062
$\sigma_{Yk\_std}$	0.0016	0.0019	0.0022	0.0018	0.0023	0.0019	0.0025	0.0029	0.0032

\*( ) : the value is the average  $\mu_{Yk\_ave}$  divided by  $\mu_x$

As an example of the results, the accuracy of the first three-order moments ( $m_1$ ,  $m_2$ , and  $m_3$ ), estimated by PE, are shown in Fig. 2. The figure presents a comparison between 3PE and 9PE for Case C1. Totally, the moments for PE approximately correspond to those for MCM, and their correlations are high. The minimum correlation coefficients among the nine cases are 0.973 and 0.995 for 3PE and 9PE, respectively, as shown in Table 3. Although the accuracy of the moment estimation for 9PE is better than that for 3PE, there seems to be no large difference.

In contrast, the accuracy of the second-order central moment  $\sigma_Y$  for 3PE, 7PE, and 13PE is shown in Fig. 3. As noted in section 2.2 (Eqs. (12) and (13)), the accuracy of  $\sigma_Y$  is not high because the small

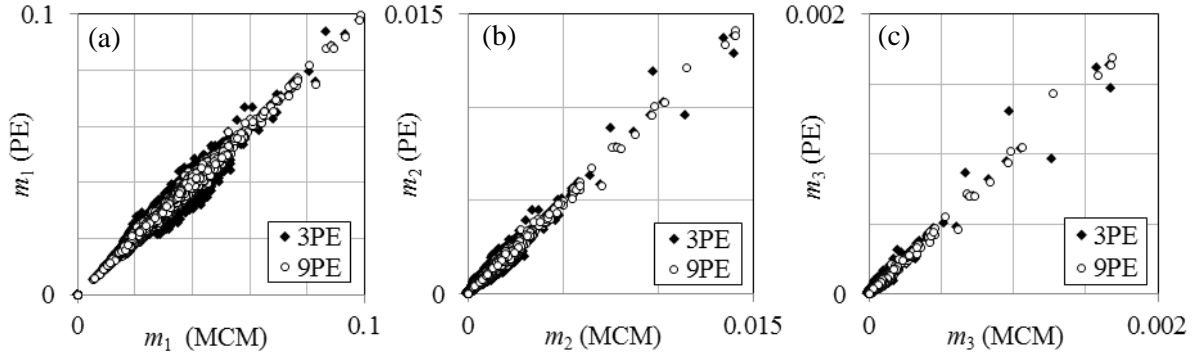


Figure 2. Comparison of estimation accuracy of moments of  $\theta_{maxi}$  between two kinds of PEs (Case C1): (a)  $m_1$ , (b)  $m_2$ , and (c)  $m_3$

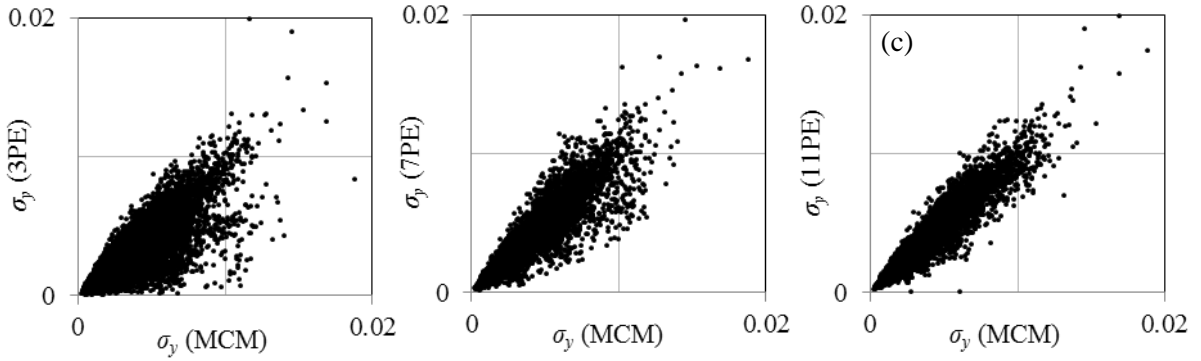


Figure 3. Estimation accuracy of second-order central moment of  $\theta_{maxi}$  for three kinds of PEs (Case C1): (a) 3PE, (b) 7PE, and (c) 11PE

Table 3. Minimum correlation coefficient among nine cases

PE	$m_1$	$m_2$	$m_3$	$m_4$	$\sigma_Y$
3PE	0.973	0.995	0.994	0.991	0.731
9PE	0.995	0.999	0.999	0.999	0.869

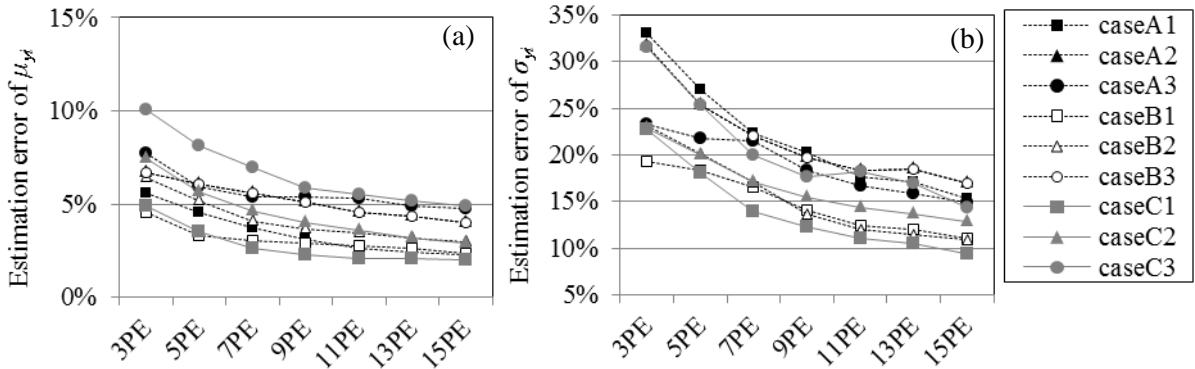


Figure 4. Error in estimation of statistics: (a)  $\mu_{yi}$  and (b)  $\sigma_{yi}$

estimation errors for  $m_1$  and  $m_2$  directly influence it. Therefore, the correlation coefficient for  $\sigma_Y$  becomes less than that for the moments, as shown in Table 3. Not only the moments, but also the central moments are used to estimate PDF by GC, and it is desirable that the accuracy of both be as high as possible. However, the effectiveness of the increase in evaluation points is also clear according to Fig. 3. Figure 4 shows the changes in error in the estimation of statistics  $\mu_Y$  and  $\sigma_Y$  with the number of evaluation points. The figure indicates that with a greater number of evaluation points, the accuracy of the estimation of the statistics will be higher. In addition, the change seems to be exponential-like and approximately becomes small from 7PE or 9PE. This also indicates that the effectiveness of increasing the number of evaluation points is high around seven or nine points in this study.

#### 4.5 Estimation of exceedance probability and accuracy

Using the statistics obtained in the previous section,  $EP_{\theta,i}$ , which represents a probability and exceeds a targeted maximum story drift angle  $\theta$  for the  $i$ -th building, is calculated from Eq. (17) for  $\theta=1/100$  and  $1/50$ . Hereafter, “GC3”, “GC5”, ..., “GC15” represent the results obtained from the Gram-Charlier expansions for 3PE, 5PE, ..., 15PE, respectively. Figures 5 and 6 show the comparison of  $EP_{1/100,i}$  and  $EP_{1/50,i}$  for Case A1. From these figures, the estimation accuracy of the exceedance probability greatly improves with an increase in the number of evaluation points for both  $EP_{1/100,i}$  and  $EP_{1/50,i}$  in this case.

The rate which indicates that the estimation error does not exceed 10% is calculated for all cases by

$$R_{\theta, err \leq 10\%} = N_{\theta, err \leq 10\%} / N_b \quad (\theta = 1/100, 1/50)$$

where  $N_b$  is the number of buildings ( $N_b=7348$ ) and  $N_{\theta, err \leq 10\%}$  is the number of  $i$  which satisfies the following inequalities for each  $\theta$ .

$$EP_{\theta,i}(MCM) - 0.1 \leq EP_{\theta,i}(GC) \leq EP_{\theta,i}(MCM) + 0.1 \quad \text{for } i=1, \dots, N_b$$

Figure 7 presents the changes in rates  $R_{1/100, err \leq 10\%}$  and  $R_{1/50, err \leq 10\%}$  with the number of evaluation points. Most cases show that the accuracy of the damage evaluation rises with an increase in the number of evaluation points. However, the amount of improvement in accuracy also falls with an increase in the number of evaluation points. The tendency is likely to become stronger when the estimation accuracy is extremely low. These results indicate that an increase in the number of evaluation points of only several numbers will effectively bring about high estimation accuracy for the damage evaluations based on point estimates with the Gram-Charlier expansion.

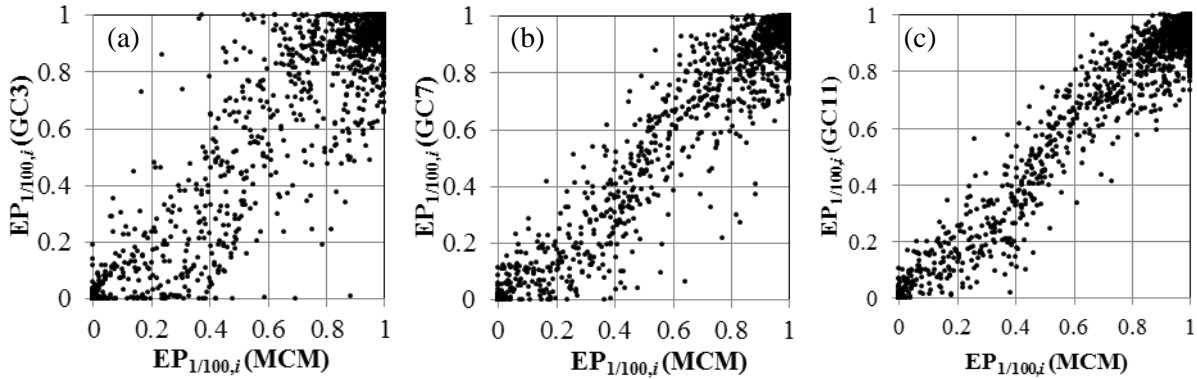


Figure 5. Comparison of exceedance probabilities  $EP_{1/100,i}$  (Case A1 ): (a) GC3, (b) GC7, and (c) GC11

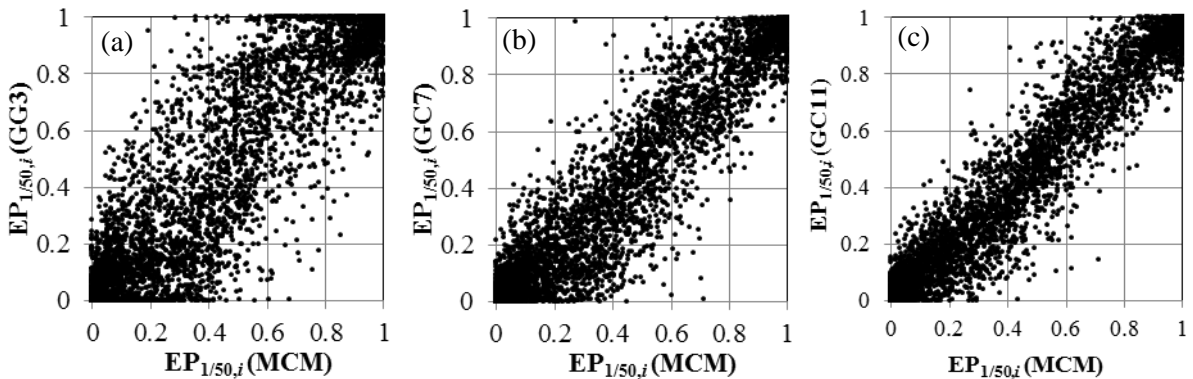


Figure 6. Comparison of exceedance probabilities  $EP_{1/50,i}$  (Case A1 ): (a) GC3, (b) GC7, and (c) GC11

## Case A1

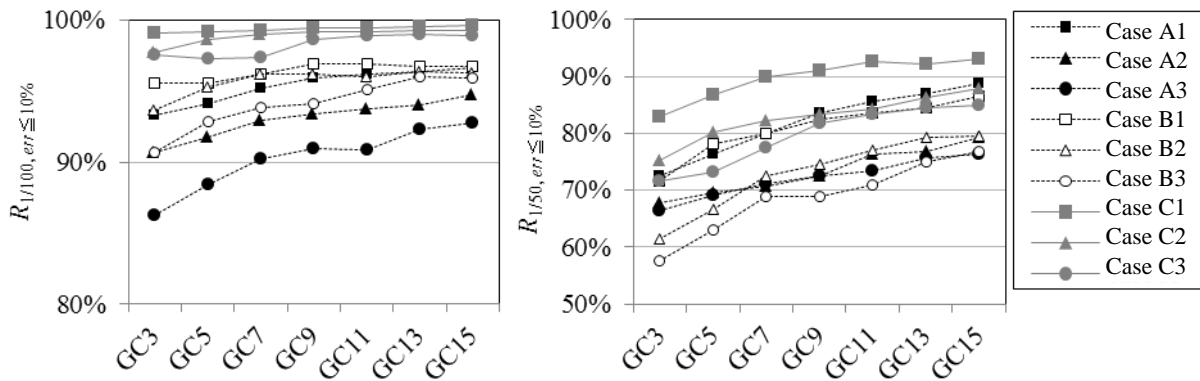


Figure 7. Rate indicates that estimation error does not exceed 10%: (a) EP1/100 and (b) EP1/50

## 5 CONCLUDING REMARKS

As a practical method for the damage estimation of building structures with model uncertainty, based on a large-scale numerical simulation, a damage-evaluation method, founded on point estimates using the Gram-Charlier expansion, was introduced. The influence of the evaluation points on the accuracy in estimating the statistical values of seismic responses and damage probability was examined. In the present simulation cases, the amount of improvement in estimation accuracy gradually decreased with an increase in the number of evaluation points. This suggests that a limited number of increases in evaluation points is effective for damage evaluations in large-scale simulations.

High accuracy in estimations may be realized by smaller numbers of evaluation points if a more realistic model and its uncertainty are employed. On the other hand, further studies are needed to address problems with several variables; not using so many evaluation points may still be disadvantageous. The effectiveness of the selection of evaluation points needs to be examined not only by focusing on the response properties, but also by considering the calculation load using a more realistic model and uncertainty.

## REFERENCES:

- Christian J. T. and Baecher G. B. 1999. Point-estimate method as numerical quadrature. *Journal of Geotechnical and Geoenvironmental Engineering*. 779-786.
- Hong H. P. 1998. An efficient point estimate method for probabilistic analysis. *Reliability Engineering and System Safety*. 59. 261-267.
- Hori M. and Ichimura T. 2008. Current state of integrated earthquake simulation for earthquake hazard and disaster. *Journal of Seismology*. 12(2). 307-321.
- Miller A. C. and Rice T. R. 1983. Discrete approximations of probability distributions. *Management Science*. Vol. 29. No. 3. 352-362.
- Nakajima M. and Morikawa H. 2009. A method of accurate calculation of seismic structural failure probability using multi point estimate. *The 10th International Conference on Structural Safety and Reliability*. Sep. 13-17, Osaka, Japan. 1-6.
- Rosenblueth E. 1975. Point estimate for probability moments. *Proc. Nat. Acad. Sci. USA*. Vol. 72. No. 10. 3812-3814.
- Salzer H. E., Zucker R., and Capuano R. 1952. Table of the zeros and weight factors of the first twenty Hermite polynomials. *Journal of Research of the National Bureau of Standards*. Vol. 48. No. 2. 111-116.